


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F</b>		A2	(11) International Publication Number: <b>WO 98/40809</b>
			(43) International Publication Date: 17 September 1998 (17.09.98)
(21) International Application Number: PCT/US98/04739 (22) International Filing Date: 12 March 1998 (12.03.98) (30) Priority Data: 08/816,410          13 March 1997 (13.03.97)          US (71) Applicant: CHAI TECHNOLOGIES, INC. [US/US]; 704 Broadway, New York, NY 10003 (US). (72) Inventor: SIXTUS, Timothy; 704 Broadway, New York, NY 10003 (US). (74) Agent: BARKUME, Anthony, R.; Anthony R. Barkume, P.C., Suite 200, 14 South Main Street, Sayville, NY 11782 (US).			(81) Designated States: AU, BG, BR, CA, CN, CZ, HU, ID, IL, JP, KR, MX, NO, NZ, PL, RO, SG, TR, UA, VN, YU, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: METHOD AND SYSTEM FOR SECURE ONLINE TRANSACTION PROCESSING

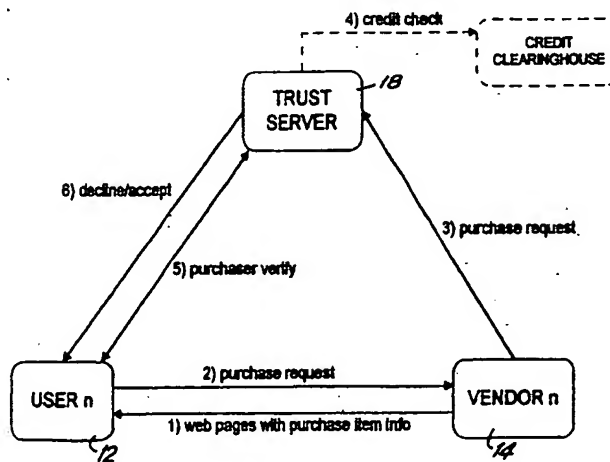

(57) Abstract

A method for executing a secure online transaction between a vendor computer (14) and a user computer (12), wherein vendor (14) and user (12) computers are interconnected to a network (16). The method comprises the steps of the user computer (12) transmitting a transaction request message to the vendor computer (14) via the computer network (16), the financial transaction request comprising user identification data unique to the user computer (12); in response to receiving the transaction request, the vendor computer (14) sending a transaction verification request to a trust server computer (18) interconnected to the computer network (16), the transaction verification request comprising the user identification data and data indicative of the requested transaction; in response to receiving the transaction verification request, the trust server computer (18) authenticating the user computer (12) by using the user identification data and communicating with the user computer (12) for verification with the user identification data; and the trust server (18) authorizing the transaction when the authenticating step has passed.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

METHOD AND SYSTEM FOR SECURE ONLINE TRANSACTION PROCESSINGTECHNICAL FIELD

5 This invention relates to online electronic commerce, and in particular to a secure methodology for approving an online transaction carried out over the Internet by authenticating the identity and credit of the purchaser without transmitting a credit card number or other payment means as part of the online transaction.

10

BACKGROUND ART

The Internet is constantly expanding at a very high pace and has become one of today's essential communication and information environments. But nevertheless, its  
15 potential as a facilitator of electronic commerce has not been fully realized. This is because today's networks are not secure enough for transmitting sensitive financial information. Despite the constant development of new encryption methods, they are seemingly never beyond a  
20 hacker's ability. Most users do not even want to take the chance of someone eavesdropping on their credit-card number or even postal address as it is carried along even the most secured network communication paths. The biggest problem for electronic commerce today is users' lack of trust and  
25 the psychological barriers to use of the Internet as a tool for commerce that arise therefrom.

Prior art systems have been developed in an effort to meet this need; for example, a system has been proposed  
30 called Secure Electronic Transaction (SET). With SET-

enabled software and an account with a financial institution that supports the system, a user can go to an Internet World Wide Web (WWW) site, choose products to buy, and then order them with a few mouse clicks. The order is processed, the  
5 buyer's identity and account are verified, and the transaction is complete. Whether it's a checking or credit card account, or another payment system such as DIGICASH or FIRST VIRTUAL, it will be with a financial institution (such as MASTERCARD or VISA) that supports electronic payments,  
10 referred to as the Bank.

When a user opens the account, he receives from the Bank an electronic file called a certificate, which acts like a credit card for on-line purchases. It contains  
15 information about the user, including a public key, it has an expiration date, and it has been digitally signed by the Bank to ensure its validity. On the other end, merchants doing business with the Banks also get certificates that include both the merchant's public key and the Bank's public  
20 key. This certificate also is signed by the Bank to indicate that the merchant is legitimate. The merchant's key will be used for ordering, while the Bank's key will be used for paying.

25 The user indicates to the merchant what product or service he wishes to purchase via e-mail, through a Web page data transfer or the like. The following series of events is set in motion that takes a few seconds to complete. First, the user's software receives a copy of the merchant's  
30 certificate and verifies that it is dealing with a valid

store since the certificate has been signed by the Bank.  
The user's software sends the merchant three items, all of  
which have been signed: the order information, which is  
encrypted with the merchant's public key; the payment  
5 information, which is encrypted with the Bank's public key  
(thus, the merchant cannot see the payment information); and  
a message digest (a code containing information from both  
the payment and the order) that ensures that the payment can  
only be used for that order.

10

After receiving these items, the merchant checks  
the user's digital signature. The merchant validates the  
user's information with a third party (likely, but not  
necessarily, the Bank) to make sure the user is genuine.  
15 The merchant then sends the user a message indicating that  
the order has been received. The merchant also sends a  
signed message to the Bank using the Bank's public key.  
This message includes the customer's payment information  
(which the merchant can't interpret) and the merchant's  
20 certificate.

The Bank first verifies that the merchant is  
legitimate, then checks the signature of the message it just  
received to make sure that the message is legitimate. The  
25 Bank then opens the enclosed payment information from the  
customer and verifies that it is good. The Bank also checks  
to make sure the payment information is for that merchant  
and that particular order. The Bank signs and encrypts an  
authorization to the merchant, which can then ship the  
30 goods.

The SET system has been criticized for various reasons, one of which is the possibility that a keystroke stealing program that attaches itself to the keyboard drivers in a user's computer can lay dormant until it is activated by the presence of a digital wallet program. It then records the keystrokes performed (before they are encrypted) and sends them to a third party. Such a phantom program could be disseminated inside a modified (but seemingly normal) electronic-commerce software package unknowingly distributed by a financial institution.

The SET methodology relied heavily on encryption, which is also another potential weakness. Certificates play a major part in SET's security scheme. The parameter that gives the certificates mathematical resistance to decryption is the length of the original encryption key. SET certificates will use a key 1,024 bits long, which is felt to provide strong enough security. But, as with any encryption-based scheme, a hacker can break the code given enough time and computing power. The problem with a total reliance on cryptographic methods is that if they are decrypted, they fail totally. Worse, if decryption is performed by a third party and goes undetected by the legitimate users, a false sense of security ensues. Stronger security for electronic transactions must have some sort of backup mechanism in place, rather than simple faith in a particular encryption scheme.

In another prior art electronic commerce scheme, the FIRST VIRTUAL system does not rely on any form of cryptography, rather it allows non-sensitive transaction information to travel over the Internet, while users' credit card numbers are gathered by phone. In addition, there is a buyer feedback mechanism built atop existing Internet application protocols including e-mail, FTP, telnet, and the World Wide Web. Because those protocols carry no proof of identity, FIRST VIRTUAL uses a payment system based on e-mail call-backs. When asked to process a financial transaction, it looks up the buyer's account and sends an e-mail message asking the buyer to confirm the validity of the transaction. The buyer can respond with "yes", "no", or "fraud". Only when the buyer says "yes" is a financial transaction initiated.

Moreover, FIRST VIRTUAL's dependency on e-mail and the "VirtualPIN" avails itself to a potential hacker's perusal for several reasons. First, e-mail is relatively easy to subvert, since it uses well known ports and can be "spoofed" or faked with simple tools and a rudimentary understanding of SMTP (Simple Mail Transfer Protocol). In addition, in the case of a slow e-mail gateway (such as that provided by most commercially available online services), mail delivery can take up to a day or more. Furthermore, the VirtualPIN is static and therefore can be impersonated.

A different scheme for electronic payments was developed by DIGICASH, based on a digital wallet containing tokens. The tokens are validated (digitally countersigned)

by a bank, but the bank can't trace the tokens to an individual user,

5       None of the prior art systems provide a secure electronic commerce methodology sufficient to be carried out in large scale use over a non-secure network such as the Internet. Primary reasons for shortcomings of the prior art are the reliance on encryption as well as the transmittal of sensitive financial data over the Internet.

10

It is therefore an object of the present invention to provide a secure methodology and system for approving an online transaction carried out over the Internet by authenticating the identity and credit of the purchaser  
15       without transmitting a credit card number as part of the online transaction.

It is a further object of the present invention to provide such a system that does not rely on encryption for  
20       transmittal of data over the Internet as part of the transaction approval process.

It is a further object of the present invention to provide such a system that utilizes a third party as a trust  
25       broker that has users (purchasers) and vendors pre-registered, so that the trust broker may validate the transaction by authenticating the user by utilizing data internally stored that is not transmitted over the Internet.



DISCLOSURE OF THE INVENTION

In accordance with these and other objects, provided is a method for executing a secure online transaction between a vendor computer and a user computer, wherein the vendor  
5 computer and the user computer are interconnected to a computer network for data communications therebetween. The method comprises the steps of the user computer transmitting a transaction request message to the vendor computer via the computer network, the transaction request comprising user  
10 identification data unique to the user computer; in response to receiving the transaction request, the vendor computer sending a transaction verification request to a trust server computer interconnected to the computer network, the transaction verification request comprising the user  
15 identification data and data indicative of the requested transaction; in response to receiving the transaction verification request, the trust server computer authenticating the user computer by using the user identification data and communicating with the user computer  
20 for verification with the user identification data; and the trust server authorizing the transaction when the authenticating step has passed.

In particular, the user computer executes the  
25 transaction request by generating a user authentication number as a first function of a user registration number unique to the user computer, time stamp data correlated to the time of the transaction request, and an internally stored user matrix unique to the user computer; assigning a  
30 network protocol port number as a second function of the

user registration number, the time stamp data, and the  
calculated user matrix; and transmitting a transaction  
request message to the vendor computer via the computer  
network, the transaction request message comprising the user  
5 registration number, the time stamp data, first data  
indicative of the requested transaction, and the network  
address associated with the user computer. The transaction  
verification request sent by the vendor computer to the  
trust broker comprises the user registration number, the  
10 time stamp data, second data indicative of the requested  
transaction, and the network address associated with the  
user computer. The trust server computer authenticates the  
user computer by calculating the user matrix by utilizing  
the received user registration number; generating a trust  
15 server authentication number as a first function of the  
received user registration number, the received time stamp  
data, and the calculated user matrix; calculating an  
expected network protocol port number as a second function  
of the received user registration number, the received time  
20 stamp data, and the calculated user matrix. The trust  
server communicates with the user computer by utilizing the  
user computer network address received from the vendor  
computer and the calculated expected network protocol port  
number. The trust server obtains from the user computer the  
25 user authentication number; it compares the obtained user  
authentication number with the generated trust server  
authentication number; and it indicates that the user  
computer is authentic when the comparison step has passed or  
indicates that the user computer is not authentic when the

comparison step has failed, or the calculated port number is not available.

The first function for generating the user authentication number comprises the step of synthesizing a user matrix as a third function of the calculated user matrix; and the first function for generating a trust server authentication number comprises the step of synthesizing a trust server user matrix as the third function of the calculated user matrix. Further, the first function for generating a user authentication number utilizes the user registration number and the time stamp data to extract the user authentication number from the synthesized user matrix; and the first function for generating the trust server authentication number utilizes the user registration number and the time stamp data to extract the trust server authentication number from the synthesized trust server user matrix.

Thus, as will be evident, the present invention is a novel online method of payment which will solve today's electronic commerce problems and utilize the Internet's massive electronic commerce potential. The invention is a complete solution consisting of servers and clients which already have an existing trust relationship and therefore only need to communicate requests, and not financial data, in order to carry out online transactions.

The system provides the ability to conduct secure electronic commerce over the Internet without communication

of sensitive or financial data. There's nothing to encrypt and therefore there's nothing to hack. Even if the online connection is eavesdropped, the information communicated over the wire is useless since it forms only part of the  
5 entire system, and is the product of a calculation, therefore it is dynamic as opposed to static information, which can be effectively reused.

A user interested in a vendor's product or service  
10 would simply access that vendor's Web pages, which already incorporate embedded transaction request buttons. By doing that, client software would be automatically downloaded to the user's machine. Once a transaction request button is clicked, a transaction takes place with no credit-card or  
15 address to type in. A few seconds pass from when a user initiates a transaction until it has been carried out.

Finally, as an integral part of the trust server system, the user-client employs a multimedia interface. The  
20 transaction request button appears as an attractive animated figure. When clicked, the animation changes accompanied by audio effects. And when the transaction is approved, the animation changes once more accompanied by an audio effect such as "cha-chang!"

25  
A vendor needs a Web site in order to offer and engage in electronic commerce. In order to use the transaction authentication system, it registers with the trust broker via any preferred means (mail, fax, phone, or  
30 Internet). Then, it adds simple HTML tags to its Web pages,

specifying information per each offered transaction. A user hitting such a Web page would need the user-client software module as a browser add-on in order to view the page. Therefore, if it is not already installed, it will be automatically downloaded and installed on the machine in a matter of seconds.

When a user requests to engage in his first transaction, he will have to register with the trust server via any preferred means (mail, fax, phone or Internet), and receive his User Registration Number. Upon entering this number and his chosen PIN in the user-client, a short introductory session takes place between it and the trust servers, which will later enable them to recognize each other online. After that, the first transaction can take place. Note that the PIN merely serves as a key to access the user-client, and is never sent over the wire.

In order to request a transaction, a user simply has to click the embedded button and enter his PIN. After that everything is done automatically. The request is sent via the vendor to the trust servers. Upon receipt of the request, the trust servers authenticate the user's machine using the same algorithm used by the user-client in order to verify its desire to carry out the transaction. After the user's credit has been cleared and the user computer's identity authenticated, the transaction is carried out and the status is shown to the user. All of this happens in a few seconds.

The system accurately tracks all transactions taken place in a database, sending vendors and users daily or monthly reports of transactions in which they participated.

5

**BRIEF DESCRIPTION OF THE DRAWING**

Figure 1 is a top level system block diagram illustrating the communications of the present invention;

10

Figure 2 is a simplified block diagram showing a single transaction and the data flow between the parties;

Figure 2a illustrates a typical Web page displayed to the user for effecting the present invention;

15

Figure 3 is a top level flowchart of the method of the present invention;

20

Figure 4a is a detailed flowchart of the browsing function of the present invention;

Figure 4b is a detailed flowchart of the user transaction function of the present invention;

25

Figure 4c is a detailed flowchart of the vendor function of the present invention;

Figure 4d is a detailed flowchart of the trust server function of the present invention;

30

Figure 5 is an illustration of the software component architecture of the present invention; and

Figure 6 is a block diagram of the user computer functionality for carrying out the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Figure 1 illustrates a top level illustration of the system 10 of the present invention. A plurality of user computers 12, designated USER1, USER2, . . . USERn are interconnected to the Internet 16 by any of various means known in the art such as a dial-up modem connection to an Internet Service Provider (ISP), a direct connection to a network that is in turn connected to the Internet, etc. The Internet 16 is a global network of interrelated computer networks allowing interchange of information therebetween. Although the Internet 16 is used in the preferred embodiment, the invention is applicable to any computer network topology where secure transactions between interconnected computers are desired. Typically, a user computer 12 will be a personal computer in a home or business environment that accesses the Internet through a commercially-available browser client software package.

A plurality of vendor computers 14 designated as VENDOR1, VENDOR2, . . . VENDORN are likewise interconnected to the Internet 16 by any of various means known in the art. The vendor computer 14 may for example be an appropriate server running on a dedicated host connected to the Internet.

A trust server 18 is also interconnected to the Internet as shown in Figure 1, and acts as a trust broker for the purpose of approving a transaction between any user computer 12 and any vendor computer 14, both of which must first be registered with the trust server 18 as will be described herein. The trust server 18 is shown with a dotted line connection to a credit clearinghouse 20, which does not form part of the present invention but which is accessed by the trust server 18 by any means known in the art (e.g. dial-up modem connection) to determine the creditworthiness of a user who requests a transaction from the trust server 18.

Each of the user computers, vendor computers, and the trust broker may communicate with each other by communication protocols well known in the art as applied to the particular network being implemented. Thus, for the preferred embodiment Internet connections, the TCP/IP protocol suite well known in the art will be implemented by each party to the transaction as described herein.

Figures 2 and 3 illustrate the data flow between a user computer 12, a vendor computer 14 associated with a transaction desired by a user, and the trust server computer 18. A user begins the process during a browsing session at step 1, where he downloads pages from various vendors via an Internet browser such as Netscape, until he views a page that describes an item he desires to purchase. As shown in Figure 2a, the user makes a transaction request by selecting



an item to be purchased at step 2 by using his mouse or other pointing device associated with the computer 12 to click on a control embedded within the screen page 22 and indicative of the item, for example in HTML (hypertext markup language) format. In Figure 2a, the user selects the clock to purchase by clicking on the associated control 20. Selection of a transaction-enabled control will initiate internal processing to be described below, and a transaction request message is transmitted by the Internet to the selected vendor computer 14 in known Internet protocol methodology. The user computer 12 then goes into a temporary wait state pending a subsequent communication from the trust server 18.

The vendor computer 14, upon receiving the transaction request message from the user computer 12, sends an image of the transaction request to the trust server 18 via the Internet at step 3. Along with the transaction request image, the vendor computer 14 sends to the trust server 18 the IP network address of the requesting user computer 12, which will allow the trust server 18 to authenticate the identity of the user computer 12 prior to authorizing the transaction. The vendor computer 14 is finished with processing for this transaction and thus waits for another transaction request from another user.

The trust server then carries out two independent functions at substantially the same time in order to expedite the transaction request approval. One function, shown as step 4, is to communicate with the credit

clearinghouse by any means known in the art, e.g. through a direct dial-up modem connection, in order to determine the creditworthiness of the user for the requested transaction. The trust server 18 knows the identity of the user and the amount of credit required to approve the transaction from data contained within the transaction request. If the credit clearinghouse does not approve the request for credit reasons, then the trust server 18 declines the transaction request and notifies the user accordingly. The vendor need never be notified in the case of a declined transaction.

At the same time, at step 5, the trust server 18 performs internal processing and data communications with the user computer 12 in order to authenticate the identity of the user computer 12 and approve the transaction. The trust server 18 knows the IP address of the user computer 12 from the data transmitted by the vendor computer 14. The trust server 18 obtains a piece of data, called the user matrix authentication number (UMAN), and compares it to a trust server matrix authentication number (TSMAN) that was calculated internally as a function of the user's identity. When the respective matrix authentication numbers match, then the user is considered to be authentic, and the transaction is approved at step 6.

Thus, the triangulation methodology of the present invention for approving a transaction request is apparent from the three-party process illustrated in Figure 2. The user computer 12 and vendor computer 14 are both pre-registered with the trust server 18, which acts as a trust

broker performing trust and authentication services. The vendor has trust in the trust server 18 and relies on its method of authenticating the user, since it knows that the trust server 18 will only allow transactions requested by registered users. Since the users are pre-registered with the trust server, the trust server can request authentication information that would only be known to the user computer 12.

10                   Importantly, in the present invention, the user's credit card number or other like sensitive information is not transmitted between entities as part of the transaction approval process. Instead, the user registers with the trust server, to be described in more detail below, by  
15                   secure communications means; i.e. by direct telephone connection, by fax, regular mail, etc. Once the trust server registers the user, it can use the credit card number for credit approval without the user needing to transmit sensitive financial information or other electronic payment  
20                   means over the Internet. A further beneficial result of this process is that the vendor computer 14 is never provided with the user's credit card number or other payment account numbers, thus reducing the chances of vendor fraud in the system. The only information that the vendor obtains  
25                   is the item to be purchased, and user identification information (to enable shipment to the user).

                  The specific methodology of the preferred embodiment will now be explained with reference to Figures  
30                   4A-4D. Step 1, wherein the user browses on the Internet for

a desired transaction, is shown in detail in the flowchart of Figure 4A. The user executes standard Internet browsing commands using the user browser client software running on the user computer. The Internet browser forwards  
5 appropriate browsing commands to the selected vendor computer 14, for example using HTML embedded tags as controls for accessing URL's (uniform resource locators) associated with the IP address of the vendor computer 14. In response, the vendor computer 14 transmits back to the  
10 user browser client embedded web pages for display to the user. Once the user has found a desired item or service to purchase, which will be displayed in HTML format on a vendor's web page, then the user clicks on the embedded control associated with the selected item. A user client  
15 software module is then accessed by the control, which will carry out functions appropriate for executing a transaction request.

Figure 4B illustrates the detailed steps carried  
20 out by the user client software module resident on the user computer 12. If the user client software module is not present on the user computer; i.e. the user has never before accessed the transaction request system of the present invention, then the embedded control will download  
25 automatically from an approved FTP site the appropriate installation routine, which will proceed to install the user client module on the user computer. If the user client module has been installed, but the present transaction is the first one carried out by the user, then the client  
30 module will prompt the user via a dialog box to enter a pre-

assigned registration number that uniquely identifies the user. The user may obtain the registration number through a registration process with the trust server 18 through secure communication means such as facsimile or a toll-free  
5 telephone call. The user provides an operator associated with the at the trust server with his name, address, etc. and a credit card or other payment mechanism that the user wishes to utilize for future transactions. The trust server assigns a unique user registration number to the user, and  
10 records it along with this the user information in a local database. Thus, when the trust server receives a transaction request from a vendor, it takes the user registration number supplied by the vendor and fetches from the database the user's identification information,  
15 including the credit card number that will be used in the transaction. Thus, after the initial secure communications with the trust server, the user need not transmit his credit card number or any other data over the Internet as is required by prior art electronic commerce systems.

20

After the user inputs the registration number once for the first transaction request, he also is asked to input a PIN for subsequent transaction sessions. The PIN is used to only to access the user client and is not used in  
25 Internet communications. By requiring a PIN to be entered at every session, the chance of an unauthorized person illicitly using the user's computer to execute a transaction (which would then use the user's financial payment scheme or credit card number) is eliminated. Thus, in ensuing  
30 sessions, when the PIN is requested and not input properly,

then access to the user client is denied and the transaction request cannot be made by the system.

Additionally at the first transaction request  
5 session, a user matrix is generated as a function of certain  
unique hardware identifiers found in the system. For  
example, the user client may fetch a serial number from the  
user's hard drive and process it to generate the user  
matrix. This is stored locally on the user's hard drive for  
10 subsequent processing and authentication with the trust  
server. A second variable, the user matrix authentication  
number (UMAN), is set equal to the user matrix for the  
initial transaction request only.

15 When the transaction request is not the first one,  
i.e. the user has used the system previously, then the user  
client module calculates the UMAN as a function of the user  
registration number (fetched from memory), the user matrix  
(fetched from memory), and a time stamp field that is  
20 correlated to the real-time clock of the user computer. The  
time stamp is an additional security feature that is not  
required, but which is preferred since it changes with every  
transaction request and makes it more difficult to spoof  
(trick) the system. The function used to generate UMAN may  
25 be any robust function generator that takes the three input  
variables and calculates an output; the function may be a  
multiplier, a matrix builder, a shift register, etc.

The identical function generator used to generate  
30 UMAN is also stored on the trust server 18, and will be used

by the trust server to generate the trust server matrix authentication number TSMAN for authentication of the user computer 12.

5           The user client module also utilizes the user registration number, the user matrix, and the time stamp field to generate a number that is used to assign and open a protocol port number PORT per the TCP/IP format. A function generator, similar but not necessarily identical to, the  
10       function generator used to calculate UMAN, is used for the PORT calculation. That is, PORT may be any robust function generator that takes the three input variables and calculates an output; the function may be a multiplier, a matrix builder, a shift register, etc.

15           As with the UMAN authentication calculation, the identical function generator used to generate PORT is also stored on the trust server 18, and will be used by the trust server to generate the protocol port number PORT for  
20       communications with the user computer 12.

          The user client module also assembles a transaction request message for transmitting over the Internet to the vendor computer 14. The transaction request  
25       message is comprised of the user registration number, the time stamp field, and transaction data indicative of the item elected for purchase. The transaction data may be in the form of a SKU, a catalog number, or the like, and it may optionally describe the price of the item selected for  
30       purchase. If the price data is omitted, then the vendor

computer 14 must add the price data when it re-transmits the message to the trust server 18 for approval.

The transaction request message is then  
5 transmitted via the Internet to the vendor computer 14 by an appropriate protocol, such as by an HTTP (hypertext transfer protocol) request. HTTP is well known in the art and is currently a popular mode of transmitting data packets (IP datagrams) over the Internet. Of particular relevance to  
10 the present invention is the ability of the recipient, in this case the vendor computer 14, to extract from the HTTP request header the IP address of the source computer, i.e. the user computer 14. The invention is not limited to being used with HTTP, however, since any transfer protocol that  
15 allows the recipient to extract the sending computer's network address will also be operable. If the transfer protocol used does not provide such information, then the transaction request message must be provided with it during the message assembly by the user computer.

20

After transmitting the transaction request message to the vendor computer 14, the user computer 12 sits in a wait state pending communications from the trust server 18 via the open protocol port PORT.

25

As shown in Figure 4c, the vendor computer 14 receives the transaction request message over the Internet and assembles a transaction verification request for transmission to the trust server. The transaction  
30 verification request is essentially an image of the



transaction request message, and comprises the user registration number and the time stamp field taken from the transaction request message as well as transaction data indicative of the item selected for purchase, in particular  
5 of its price. If the user computer 12 provided only a SKU or catalog number, then the vendor computer 14 must first look up the price of the item for inclusion in the transaction verification request sent to the trust sever 18. The transaction verification request also includes the  
10 computer network address of the requesting user computer 12; i.e. the IP address that is obtained from the HTTP request header prepended to the transaction request message.

Thus, the information provided to the trust server  
15 18 from the vendor computer 14 is the identity of the user (via the user registration number), the network location of the user computer (via the IP address), the price of the item to be purchased, and the time that the transaction was requested. The trust server 18 will use this information to  
20 determine the creditworthiness of the user as well as to authenticate his identity.

The vendor computer 14 is now out of the loop for purposes of this invention, and it waits for subsequent  
25 transaction requests from other users. The vendor will be informed, by any appropriate means, if the transaction is approved or declined.

The trust server 18 receives the transaction  
30 verification request from the vendor computer 14 and

proceeds to carry out two independent and essentially simultaneous processes, as shown in Figure 4d. The trust server 18 unpacks the verification request and fetches information regarding the identity of the user by accessing an internal database with the user registration number as a pointer. The trust server uses this identity information along with the price data unpacked from the message and communicates with the credit clearinghouse to determine if the user has appropriate credit for carrying out the desired transaction. This may be done by fax, telephone, dial-up modem, or over the Internet. The credit clearinghouse returns with a decision; if declined, the process ends and the user is informed by a communications channel as set forth below, if accepted, then the trust server continues with the authentication process.

Assuming that this is not the first transaction requested by this user, then the trust server implements the user registration number as a pointer to its database and fetches therefrom the user matrix previously stored for that particular user. The trust server then calculates the trust server matrix authentication number (TSMAN) as a function of the user registration number, the user matrix(fetched from memory), and the received time stamp field. The function used to generate TSMAN is identical to the function stored on the user computer 12 and used by the user computer to generate UMAN.

The user client module also utilizes the user registration number, the user matrix, and the time stamp

field to calculate the expected network protocol port number  
PORT\_EXP. As with the TSMAN authentication calculation, the  
identical function generator used to generate PORT\_EXP is  
also stored on the user computer 12 and used by the user  
5 computer to generate the protocol port number PORT for  
communications with the trust server 18.

The trust server then initiates a communication  
over the Internet with the user computer 12 by sending a  
10 data request to the IP address that was received from the  
vendor computer 14 and the calculated protocol port number  
PORT\_EXP. The user computer 12, which was in a temporary  
wait state pending receipt of this request, then returns to  
the trust server the value UMAN via the open PORT. The  
15 trust server 18, upon receipt of UMAN, compares UMAN with  
the calculated TSMAN for authentication of the user  
computer.

If the comparison step passes (UMAN=TSMAN), then the  
20 transaction is approved (assuming the credit check passes)  
and the user computer 12 is notified by the existing  
Internet connection. The credit clearinghouse is informed  
of the transaction, which updates its records accordingly.  
The vendor is ultimately notified that the transaction has  
25 been approved, so that it may carry out its part of the  
transaction, e.g. ship the purchased goods to the user. The  
vendor will be paid for the transaction by any means used in  
the art for credit card transactions.

If the comparison step fails, then the transaction is declined and the user computer 12 is notified by the existing Internet connection.

5           The status of the transaction is also stored by the trust server 18 in an internal database for subsequent analysis and processing.

10           The triangulation methodology of the present invention is advantageously based on a trust basis, wherein the trust sever already has knowledge of the identity of the user and vendor computers through the pre-registration process. Since sensitive information such as credit card numbers are not communicated during a transaction, the data  
15           may be passed unencrypted. Reliance on encryption as in prior art systems is undesirable, since it is commonly accepted that an eavesdropper, given enough time, can illicitly decipher the transmissions and spoof the system to the detriment of all parties involved. In this system, an  
20           eavesdropper is only able to capture part of the data needed to spoof the system since the authentication data (UMAN) requested by the trust server will change as a function of the time stamp.

25           Essentially, the trust sever and the user have knowledge of identical data patterns that are generated "on the fly" (in real-time) in accordance with variables that are known only to each party and stored as a function of the user registration number. Of course, the data patterns may  
30           be stored in memory rather than calculated on-the-fly for

each transaction, but the memory requirements for such an embodiment would be extremely large and costly. By storing only the matrix, and using it to generate the matrix when required by identical function generators, then the memory storage requirements are lessened considerably.

The system finds useful analogy in a library metaphor. Consider the user computer and the trust server to have the same library of books, each of which has been custom-written and thus unknown to the world in general. When the trust server asks for authentication data, it is essentially asking for a certain word from a certain book in the user's library. Since the trust server has the same library, it knows what the word should be if the request is answered by the proper user. In essence, the user computer tells the trust server: "I will provide to you the twelfth word from the fourth paragraph in the sixteenth chapter of the forty-second book on the ninth shelf of the first wall of your library." This map to the proper word is provided via transmission of the user registration number and the time stamp via the transaction request message. The trust server can determine from these variables which word the user computer will have waiting, and can check it against its own mirror image library. Since the specific word transmitted over the Internet in unencrypted format will necessarily change from request to request, even for the same user, then an eavesdropper cannot spoof the system since he has no way of predicting the word that will satisfy the particular request since he does not have the same

library available to him. Capture of one word thus does the eavesdropper no good.

5 In the preferred embodiment, the function used to generate UMAN and TSMAN operates to generate a matrix using the registration number, the matrix number, and the time stamp as input variables. For example, a 16x16 matrix could be generated by forming various predetermined combinations of portions of the registration number, matrix and time  
10 stamp, and a specific location could be tagged to the UMAN and TSMAN variables by using another predetermined combination of the same variables. Since the time stamp changes from request to request, the UMAN and TSMAN will also change.

15

In an alternative embodiment, the vendor computer 14 may be eliminated from the authentication process, and the user computer 12 and the trust server 18 communicate with each other directly. In this embodiment, the user  
20 sends a transaction request message directly to the trust server, and the protocol port is opened and used for such communications. Everything else stays essentially the same as in the preferred embodiment.

**CLAIMS:**

1. A method for executing a secure online transaction between a vendor computer and a user computer, the vendor computer and the user computer being interconnected to a computer network for data communications therebetween, the  
5 method comprising the steps of:

a) the user computer transmitting a transaction request message to the vendor computer via the computer network, the  
10 financial transaction request comprising user identification data unique to the user computer;

b) in response to receiving the transaction request, the vendor computer sending a transaction verification request to a trust server computer interconnected to the  
15 computer network, the transaction verification request comprising the user identification data and data indicative of the requested transaction;

c) in response to receiving the transaction verification request, the trust server computer authenticating the user computer using the user identification data and communicating with the user computer for verification with the user identification data; and  
20

d) the trust server authorizing the transaction when the authenticating step has passed.  
25

2. A method for executing a secure online transaction between a user computer and a vendor computer, the vendor computer and the user computer being interconnected to a computer network for data communications therebetween, the user computer having associated therewith a network address unique thereto at the time of the request; the method comprising the steps of:

- a) the user computer executing a transaction request, comprising the steps of
  - i) generating a user authentication number as a first function of
    - a user registration number unique to the user computer,
    - time stamp data correlated to the time of the transaction request, and
    - an internally stored user matrix unique to the user computer;
  - ii) assigning a network protocol port number as a second function of
    - the user registration number,
    - the time stamp data, and
    - the user matrix;
  - iii) transmitting a transaction request message to the vendor computer via the computer network, the transaction request message comprising
    - the user registration number,
    - the time stamp data,
    - first data indicative of the requested transaction, and



the network address associated with the user computer;

5       b) in response to receiving the transaction request message, the vendor computer sending a transaction verification request to a trust server computer interconnected to the computer network, the transaction verification request comprising

- 10               (i) the user registration number,
- (ii) the time stamp data,
- (iii) second data indicative of the requested transaction, and
- (iv) the network address associated with the user computer;

15

c) in response to receiving the transaction verification request from the vendor computer, the trust server computer authenticating the user computer by

- 20               (i) calculating the user matrix by from an internal memory by utilizing the received user registration number to address the memory,
- (ii) generating a trust server authentication number as a first function of
  - 25               the received user registration number,
  - the received time stamp data, and
  - the calculated matrix;
- (iii) calculating an expected network protocol port number as a second function of
  - 30               the received user registration number,
  - the received time stamp data, and

the calculated user matrix,

(iv) communicating via the computer network with the user computer by utilizing the user computer network address received from the vendor computer and the calculated expected network protocol port number,

(v) obtaining from the user computer the user authentication number,

(vi) comparing the obtained user authentication number with the generated trust server authentication number; and

v) indicating that the user computer is authentic when the comparison step has passed, and indicating that the user computer is not authentic when the comparison step has failed.

3. The method of claim 2 in which:

the first function for generating a user authentication number comprises the step of synthesizing a user matrix as a third function of the user matrix; and

the first function for generating a trust server authentication number comprises the step of synthesizing a trust server user matrix as the third function of the calculated matrix.

4. The method of claim 3 in which:

the first function for generating a user authentication number utilizes the user registration number and the time stamp data to extract the user authentication number from the synthesized user matrix; and

the first function for generating a trust server authentication number utilizes the user registration number and the time stamp data to extract the trust server authentication number from the synthesized trust server user matrix.

5. A method for executing a secure online transaction between a user computer and a vendor computer, the vendor computer and the user computer being interconnected to a computer network for data communications therebetween, the user computer having associated therewith a network address unique thereto at the time of the request; the method comprising the steps of:

a) the user computer executing a transaction request, comprising the steps of

i) generating a user authentication number as a first function of  
a user registration number unique to the user computer, and  
an internally stored user matrix unique to the user computer;  
ii) assigning a network protocol port number as a second function of

- the user registration number, and  
the user matrix;
- iii) transmitting a transaction request message to  
the vendor computer via the computer network, the  
5 transaction request message comprising  
the user registration number,  
first data indicative of the requested  
transaction, and  
the network address associated with the user  
10 computer;
- b) in response to receiving the transaction request  
message, the vendor computer sending a transaction  
verification request to a trust server computer  
15 interconnected to the computer network, the transaction  
verification request comprising  
(i) the user registration number,  
(ii) second data indicative of the requested  
transaction, and  
20 (iv) the network address associated with the user  
computer;
- c) in response to the transaction verification request  
from the vendor computer, the trust server computer  
25 authenticating the user computer by  
(i) calculating the user matrix from an internal  
memory by utilizing the received user registration  
number to address the memory,  
(ii) generating a trust server authentication  
30 number as a first function of

the received user registration number, and  
the calculated matrix,

(iii) calculating an expected network protocol  
port number as a second function of

5 the received user registration number, and  
the calculated user matrix,

(iv) communicating with the user computer by  
utilizing the user computer network address received from  
the vendor computer and the calculated expected network  
10 protocol port number,

(v) obtaining from the user computer the user  
authentication number,

(vi) comparing the obtained user authentication  
number with the generated trust server authentication  
15 number; and

v) indicating that the user computer is authentic  
when the comparison step has passed, and indicating that the  
user computer is not authentic when the comparison step has  
20 failed.

6. The method of claim 5 in which:

the first function for generating a user  
25 authentication number comprises the step of  
synthesizing a user user matrix as a third function of  
the user matrix; and

the first function for generating a trust server  
authentication number comprises the step of

synthesizing a trust server user matrix as the third function of the calculated matrix.

5        7.    The method of claim 6 in which:

          the first function for generating a user authentication number utilizes the user registration number to extract the user authentication number from the synthesized user user matrix; and

10        the first function for generating a trust server authentication number utilizes the user registration number to extract the trust server authentication number from the synthesized trust server user matrix.

15

8.    The method of claim 5 wherein the user authentication number generated by the user computer is also a first function of time stamp data correlated to the time of the transaction request, the transaction request message transmitted by the user computer to the vendor computer also comprises the time stamp data, the transaction verification request sent by the vendor computer to the trust server computer also comprises the time stamp data, and the trust server authentication number generated by the trust server computer is also a first function of the received time stamp data.

20

9.    The method of claim 5 wherein the network protocol port number assigned by the user computer as also a second

25

30

function of time stamp data correlated to the time of the transaction request, the transaction request message transmitted by the user computer to the vendor computer also comprises the time stamp data, the transaction verification request sent by the vendor computer to the trust server also comprises the time stamp data, and the expected network protocol port number is calculated as a second function of the received time stamp data.

10 10. A method for executing a secure online transaction between a user computer and a vendor computer, the vendor computer and the user computer being interconnected to a computer network for data communications therebetween, the user computer having associated therewith a network address  
15 unique thereto at the time of the request; the method comprising the steps of:

a) the user computer executing a transaction request, comprising the steps of

20 i) generating a user authentication number as a first function of

a user registration number unique to the user computer, and

25 time stamp data correlated to the time of the transaction request;

ii) assigning a network protocol port number as a second function of

the user registration number, and  
the time stamp data;

iii) transmitting a transaction request message to the vendor computer via the computer network, the transaction request message comprising

5                   the user registration number,  
                  the time stamp data,  
                  first data indicative of the requested  
                  transaction, and  
                  the network address associated with the user  
                  computer;

10

b) in response to the transaction request message, the vendor computer sending a transaction verification request to a trust server computer interconnected to the computer network, the transaction verification request comprising

15                   (i) the user registration number,  
                  (ii) the time stamp data,  
                  (iii) second data indicative of the requested  
                  transaction, and  
                  (iv) the network address associated with the user  
20                   computer;

20

c) in response to receiving the transaction verification request from the vendor computer, the trust server computer authenticating the user computer by

25                   (i) generating a trust server authentication  
                  number as a first function of  
                  the received user registration number, and  
                  the received time stamp data;  
                  (iii) calculating an expected network protocol  
30                   port number as a second function of

30



the received user registration number, and  
the received time stamp data, and

(iv) communicating with the user computer by  
utilizing the user computer network address received from  
5 the vendor computer and the calculated expected network  
protocol port number,

(v) obtaining from the user computer the user  
authentication number,

(vi) comparing the obtained user authentication  
10 number with the generated trust server authentication  
number; and

v) indicating that the user computer is authentic  
when the comparison step has passed, and indicating that the  
15 user computer is not authentic when the comparison step has  
failed.

11. The method of claim 10 wherein the user authentication  
20 number generated by the user computer is also a first  
function of an internally stored user matrix unique to the  
user computer, the trust server computer fetches from memory  
the user matrix by utilizing the received user registration  
number as the memory address, and the trust server  
25 authentication number generated by the trust server computer  
is also a first function of the calculated user matrix.

12. The method of claim 10 wherein the network protocol  
30 port number assigned by the user computer as also a second

function of an internally stored user matrix unique to the user computer, the trust server computer fetches from memory the user matrix by utilizing the received user registration number as the memory address, and the expected network  
5 protocol port number is calculated by the trust server computer also as a second function of the calculated user matrix.

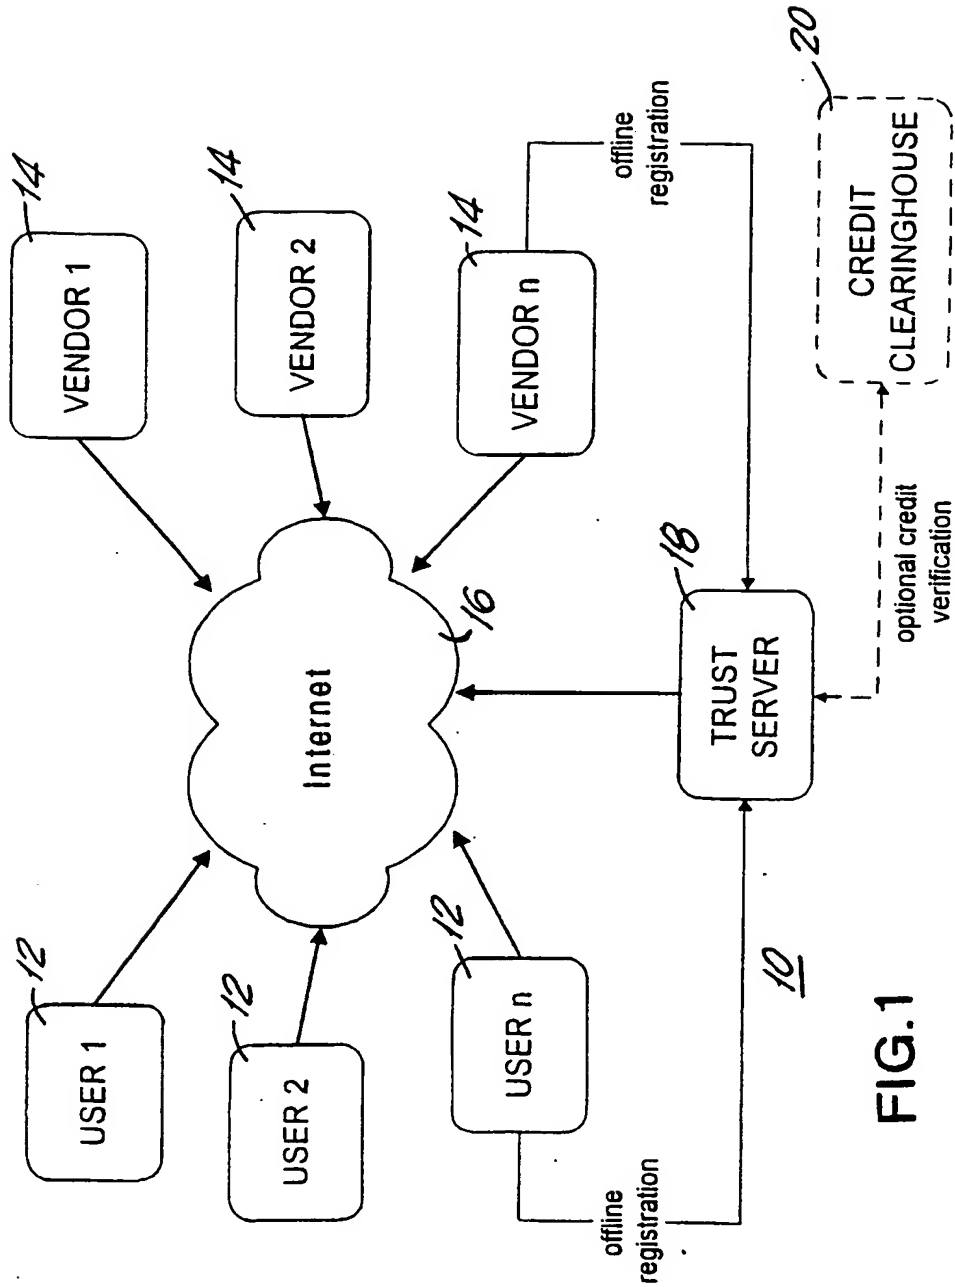


FIG. 1

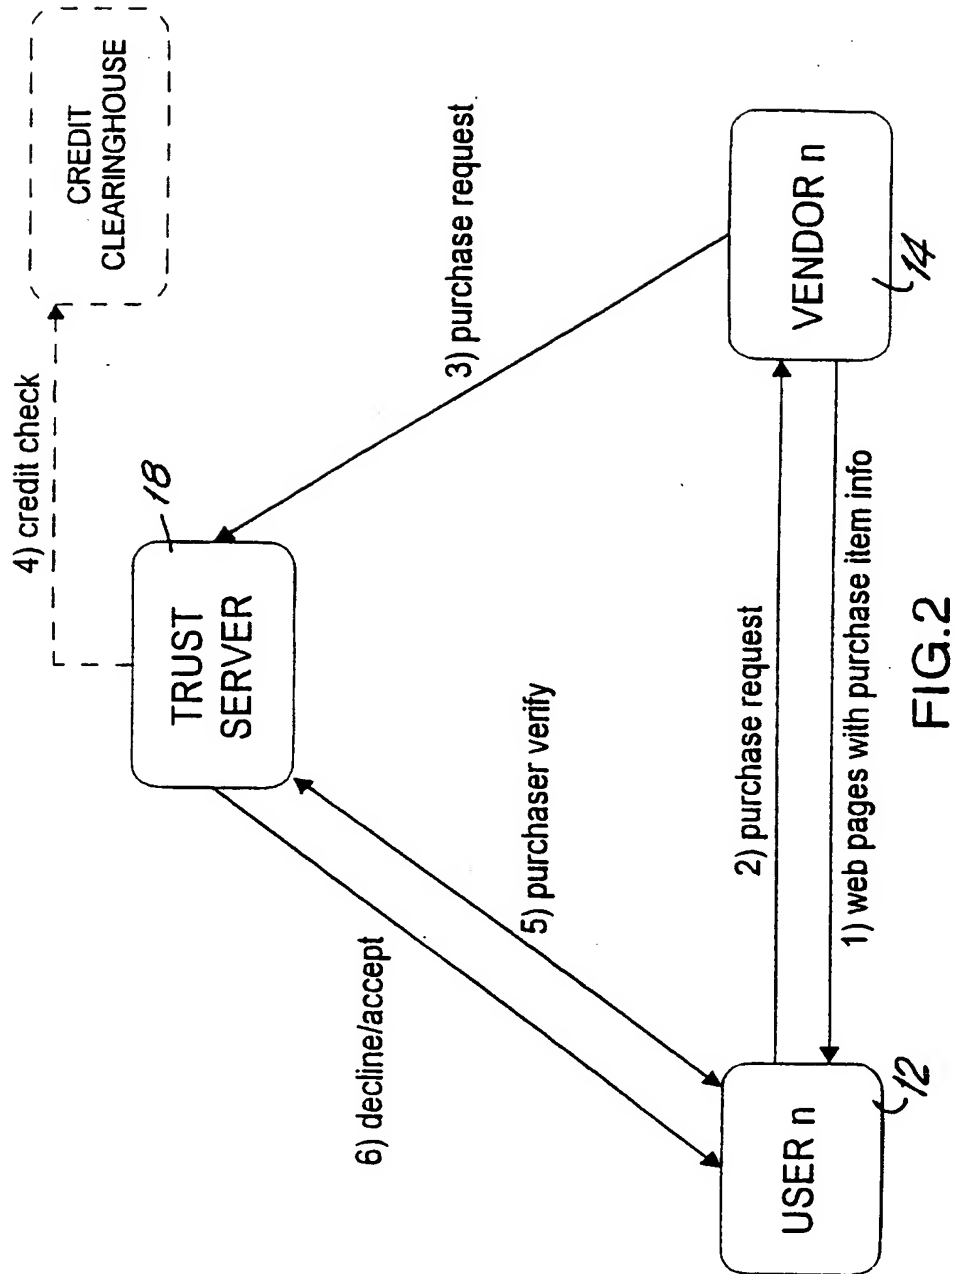


FIG.2

3/10

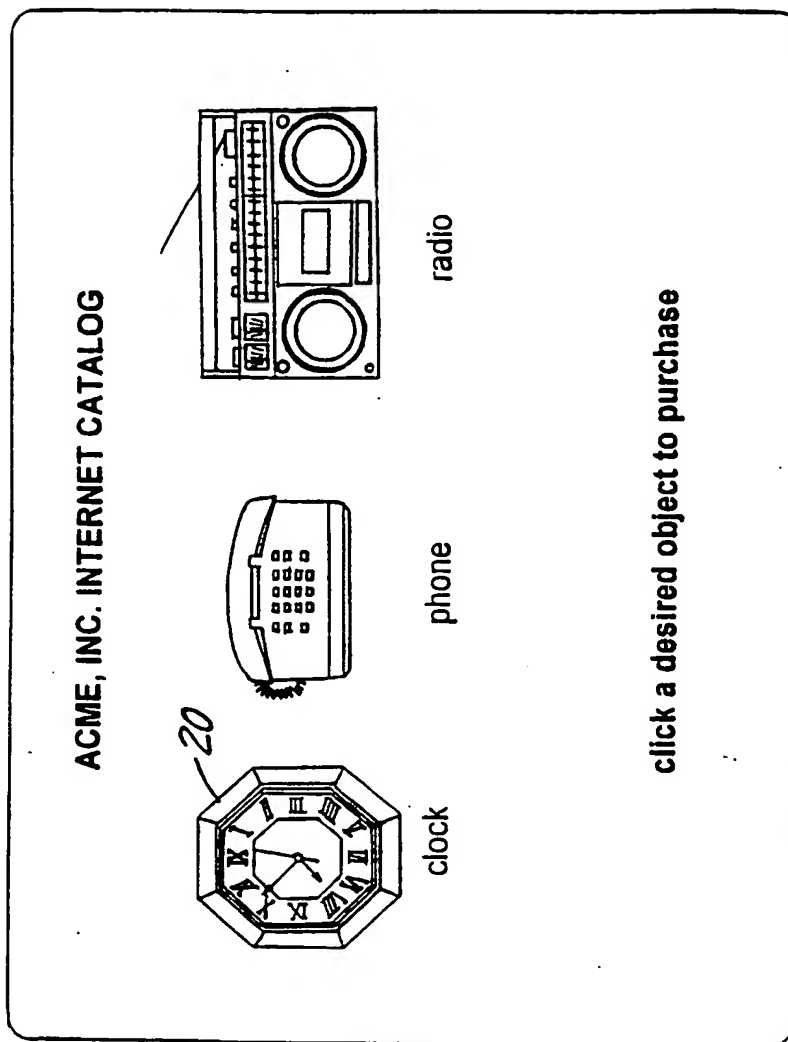


FIG. 2a

4/10

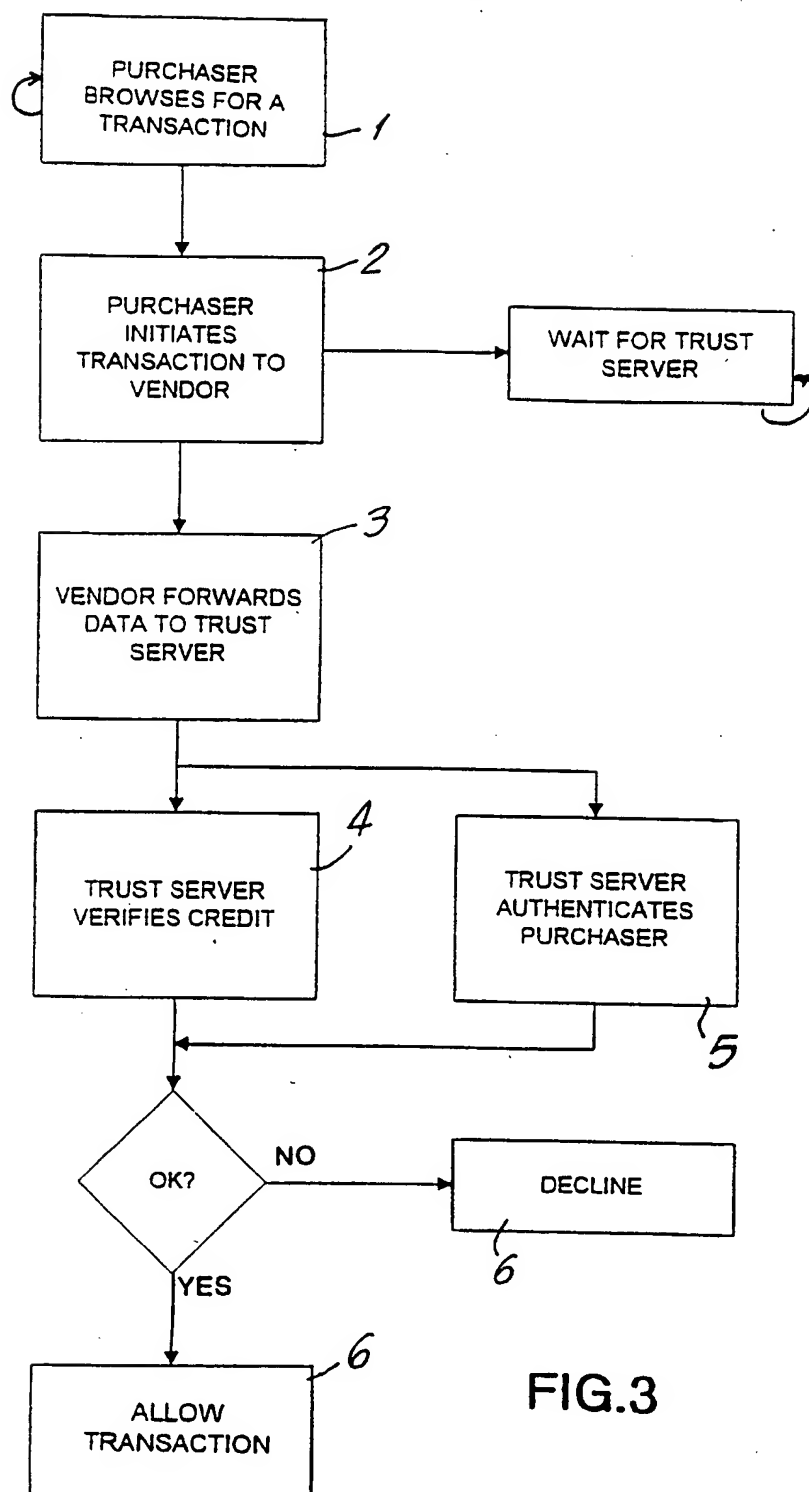


FIG.3

5/10

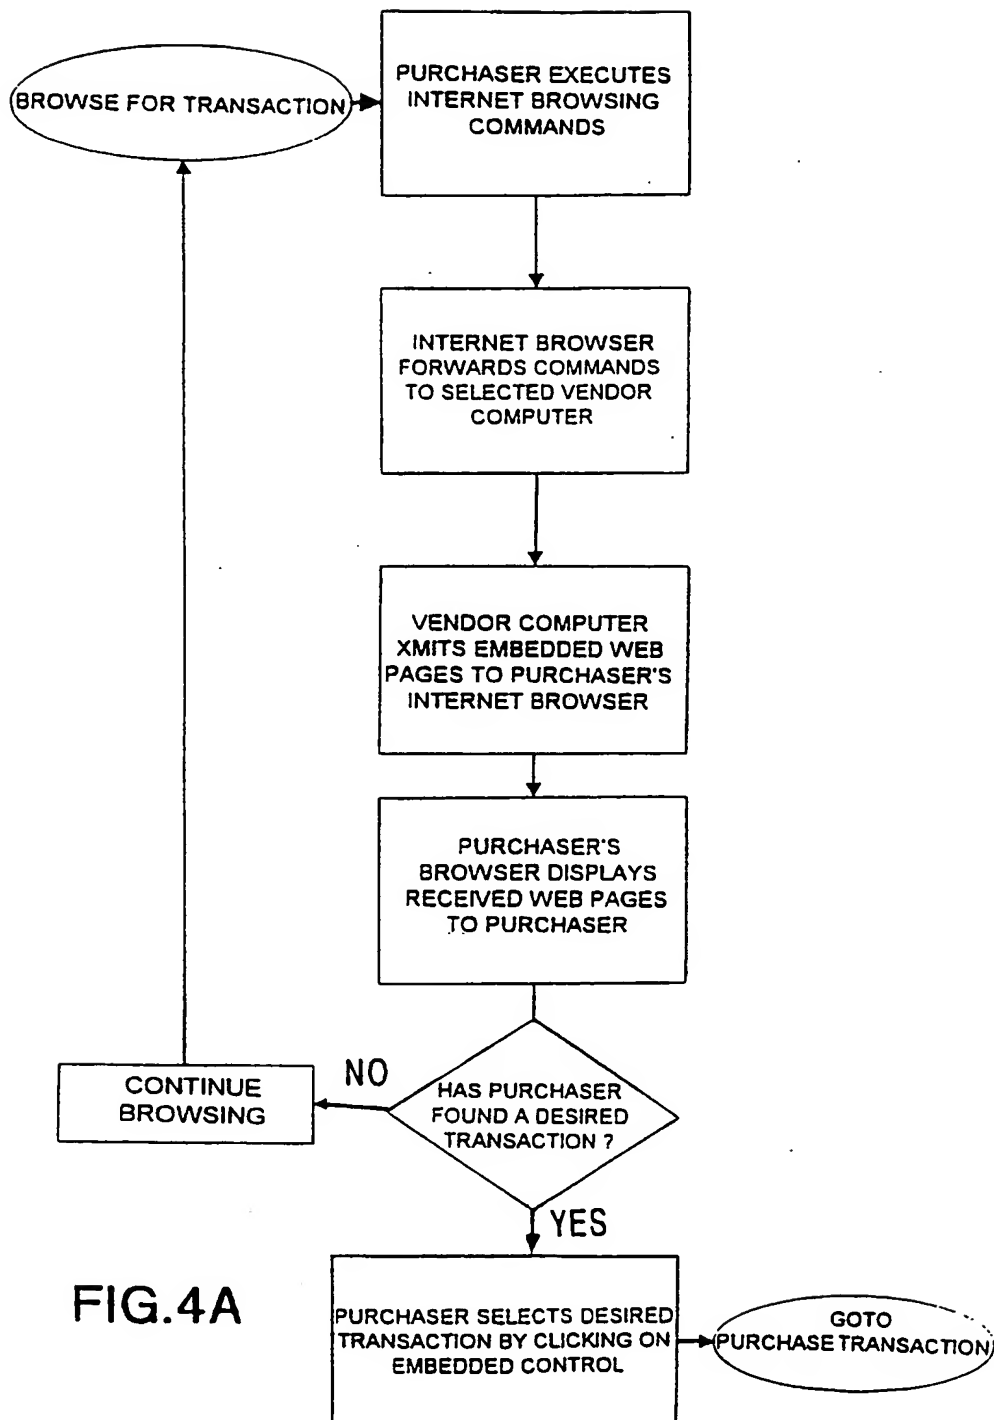


FIG.4A

6/10

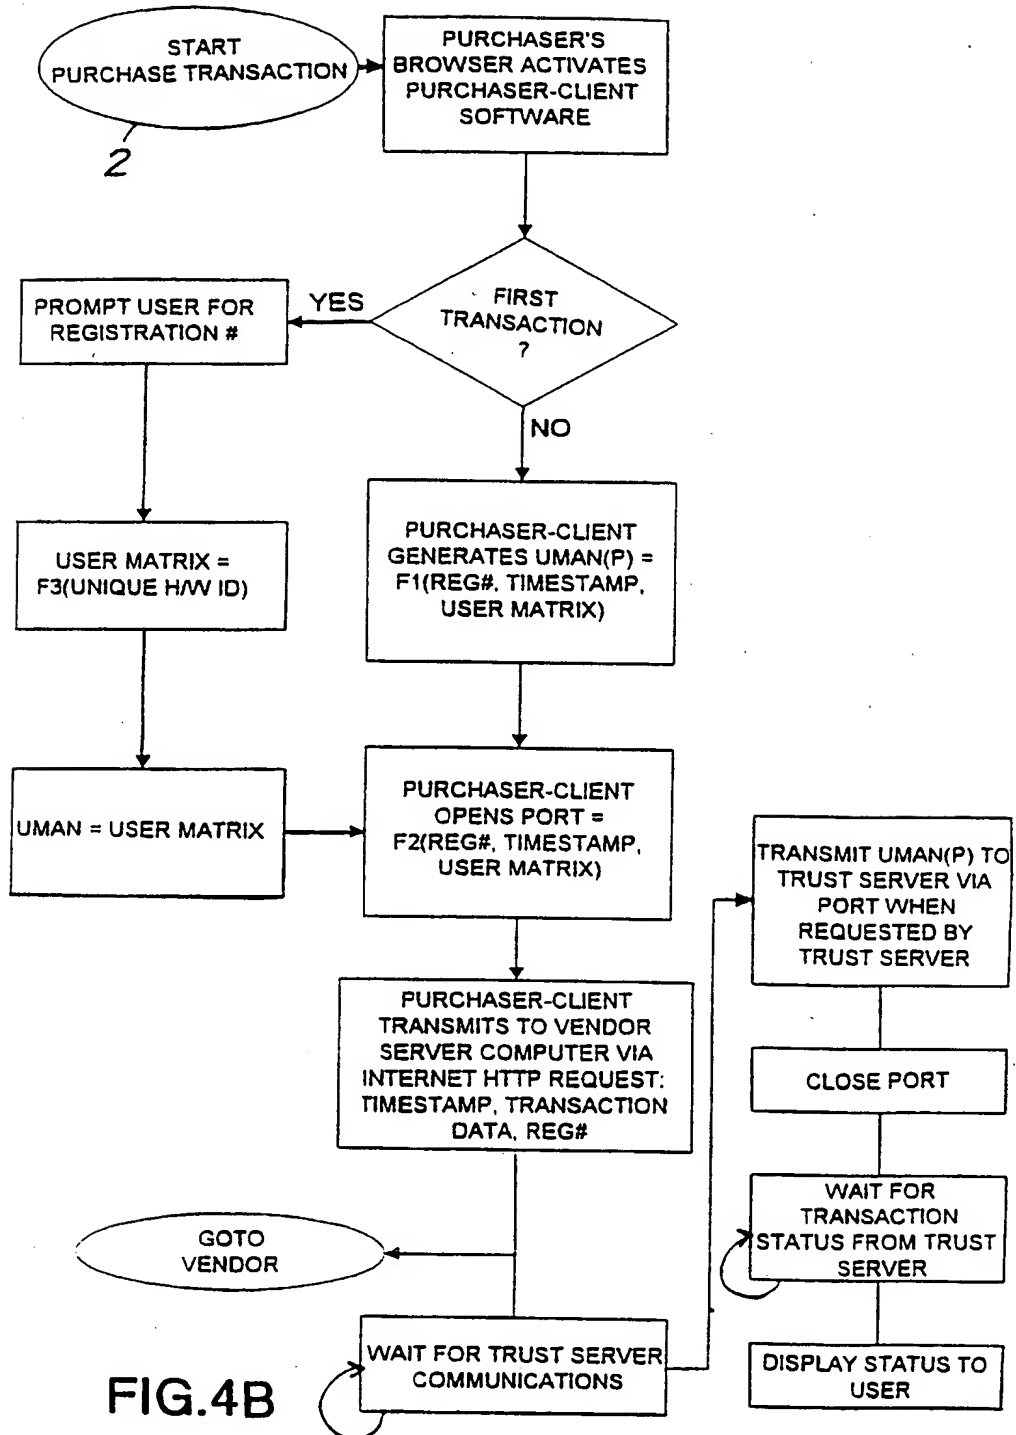


FIG. 4B



7/10

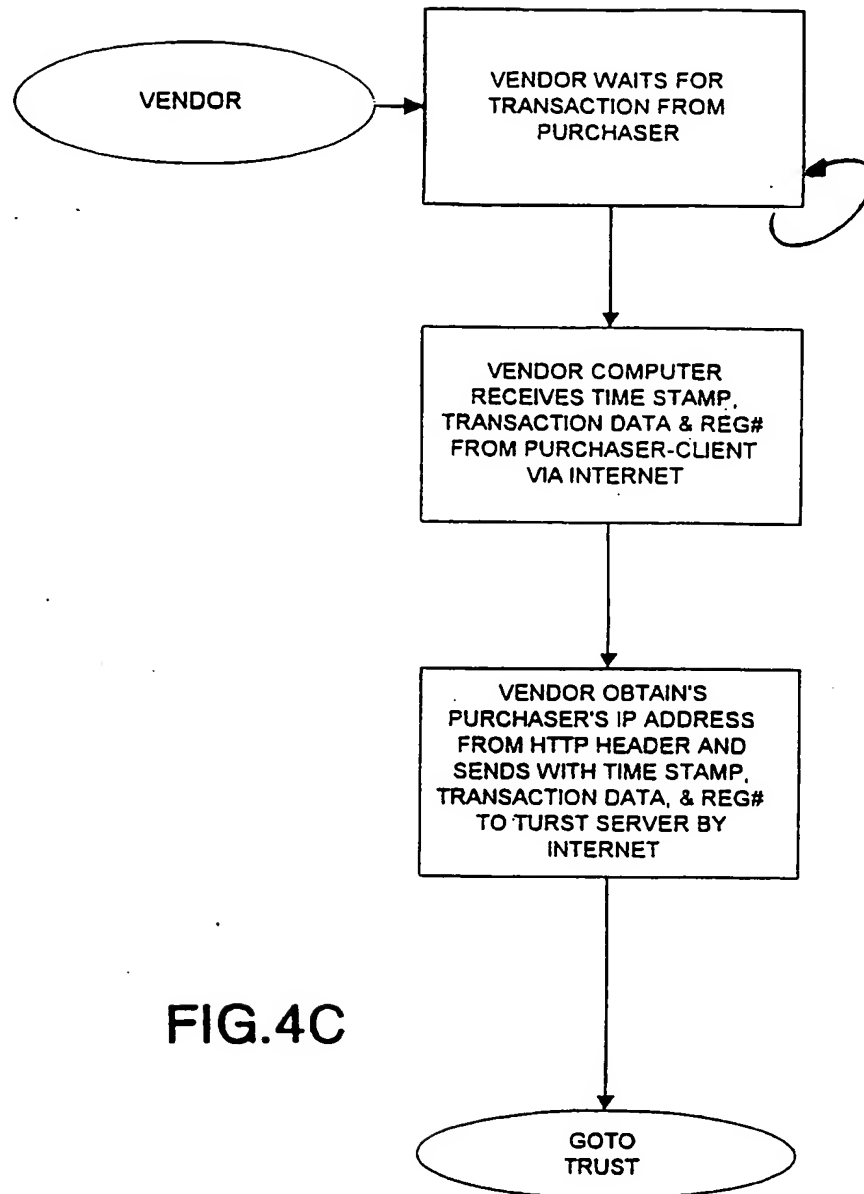


FIG.4C

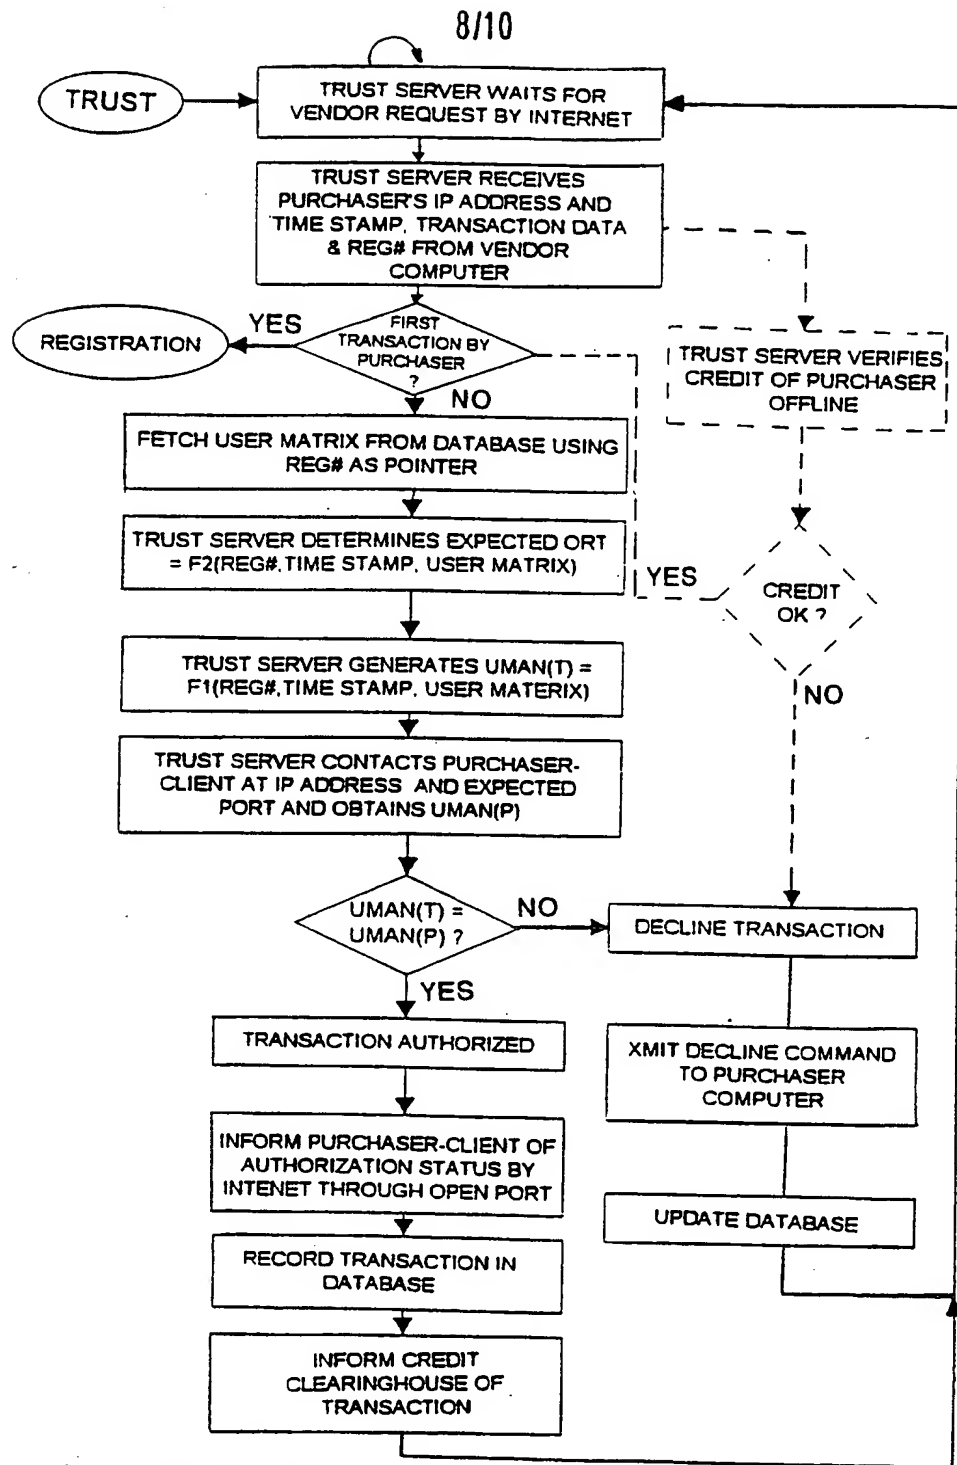


FIG. 4D

9/10

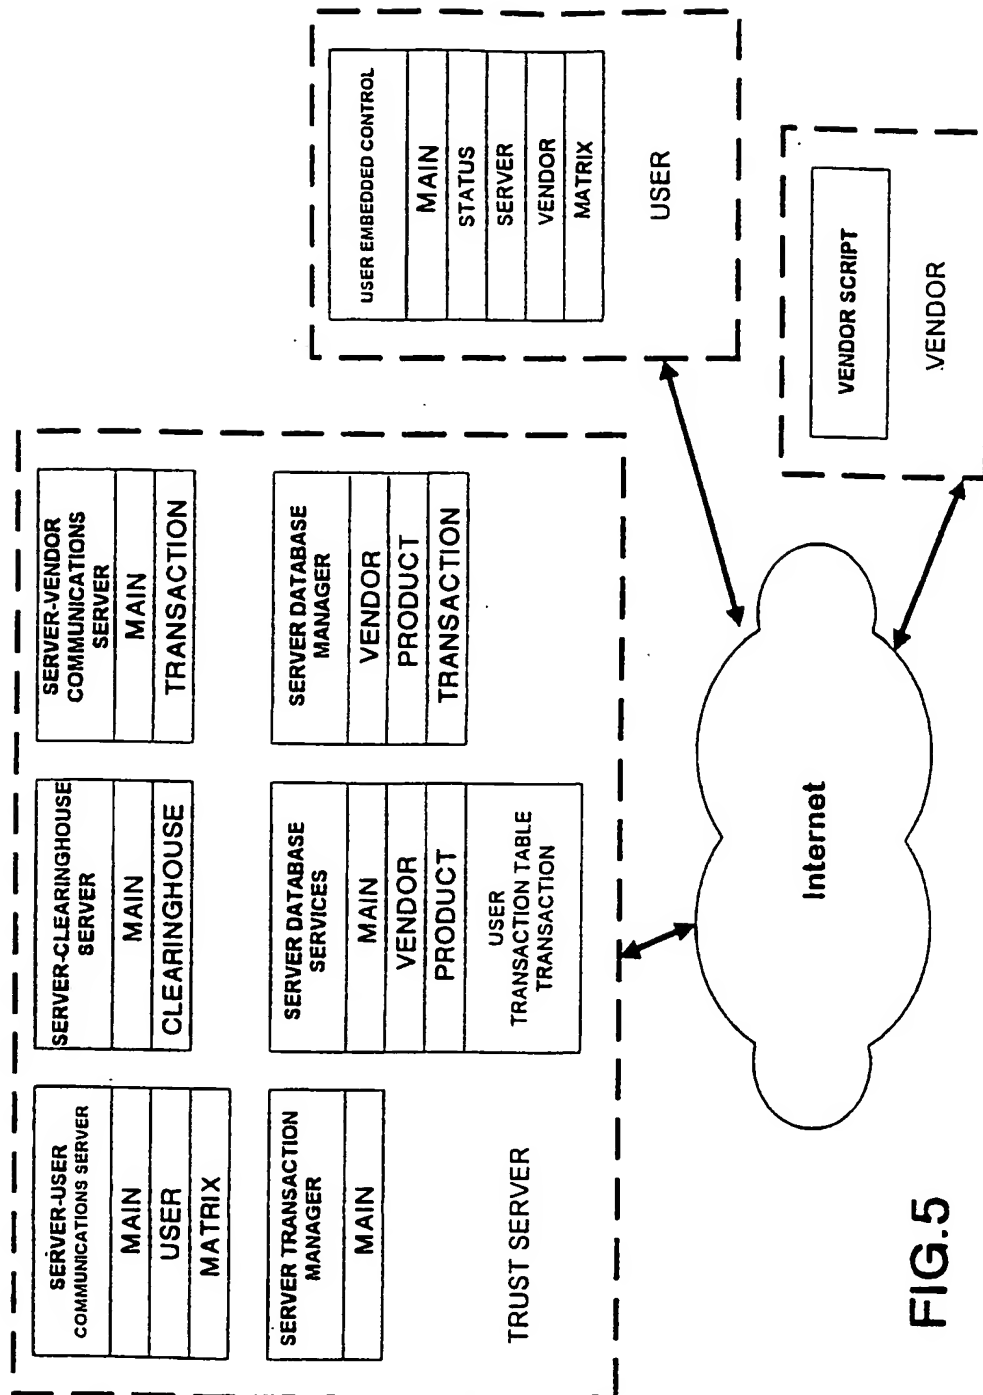


FIG.5

10/10

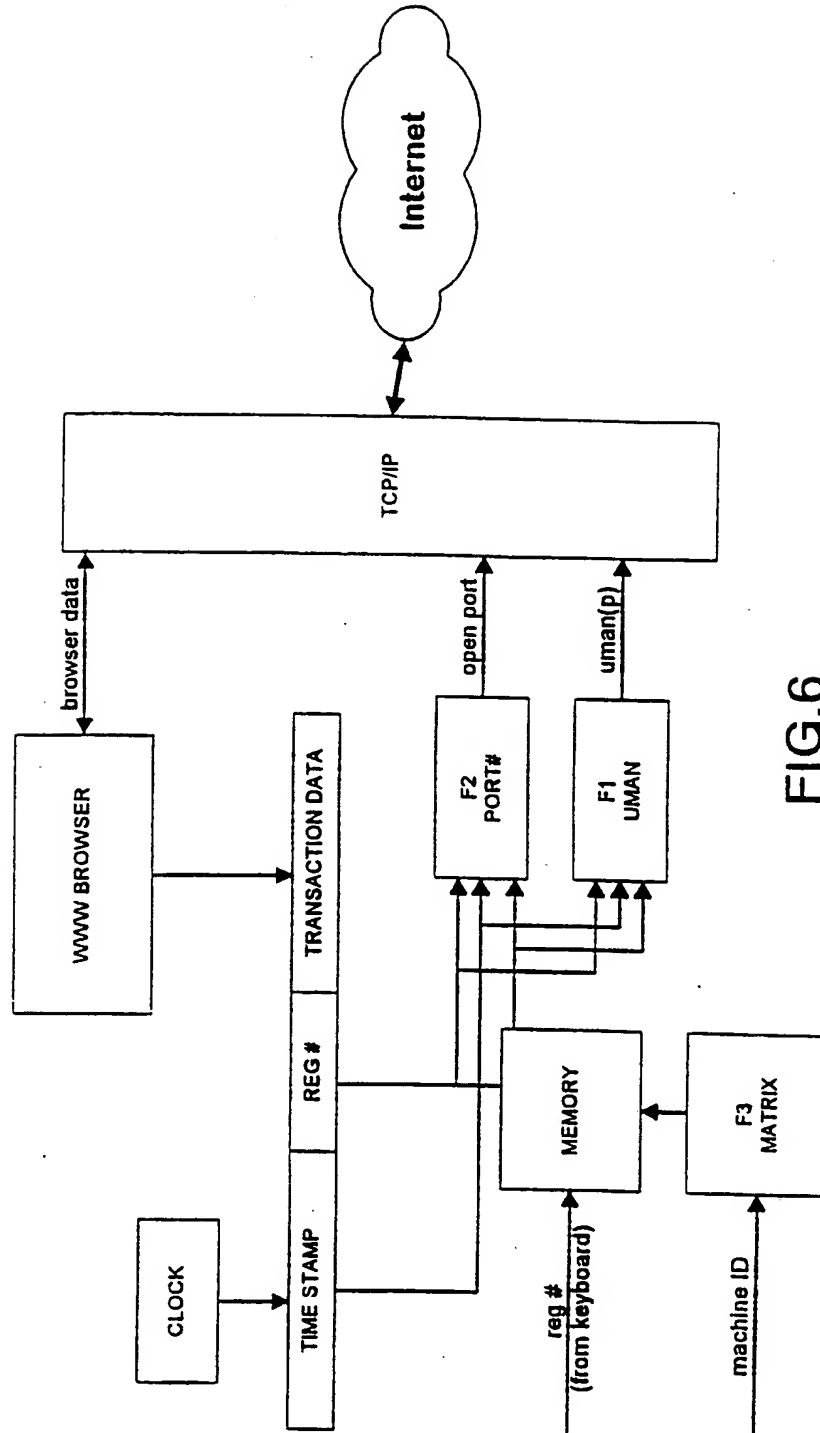


FIG. 6

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 13/00, H04K 1/00, H04L 9/00</b>		<b>A3</b>	(11) International Publication Number: <b>WO 98/40809</b> (43) International Publication Date: 17 September 1998 (17.09.98)
(21) International Application Number: PCT/US98/04739 (22) International Filing Date: 12 March 1998 (12.03.98) (30) Priority Data: 08/816,410 13 March 1997 (13.03.97) US (71) Applicant: CHA! TECHNOLOGIES, INC. [US/US]; 704 Broadway, New York, NY 10003 (US). (72) Inventor: SIXTUS, Timothy; 704 Broadway, New York, NY 10003 (US). (74) Agent: BARKUME, Anthony, R.; Anthony R. Barkume, P.C., Suite 200, 14 South Main Street, Sayville, NY 11782 (US).			(81) Designated States: AU, BG, BR, CA, CN, CZ, HU, ID, IL, JP, KR, MX, NO, NZ, PL, RO, SG, TR, UA, VN, YU, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 30 December 1998 (30.12.98)

(54) Title: METHOD AND SYSTEM FOR SECURE ONLINE TRANSACTION PROCESSING

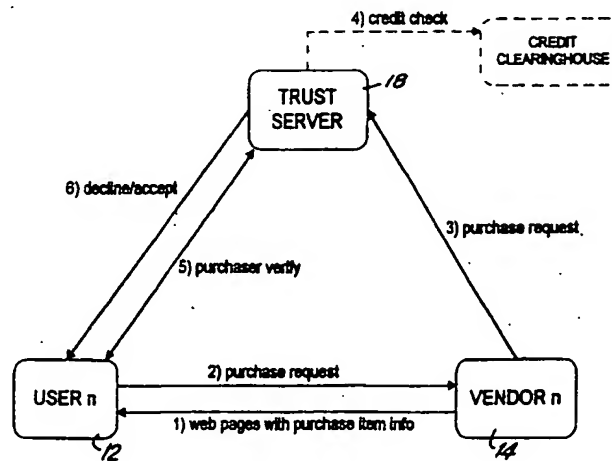

(57) Abstract

A method for executing a secure online transaction between a vendor computer (14) and a user computer (12), wherein vendor (14) and user (12) computers are interconnected to a network (16). The method comprises the steps of the user computer (12) transmitting a transaction request message to the vendor computer (14) via the computer network (16), the financial transaction request comprising user identification data unique to the user computer (12); in response to receiving the transaction request, the vendor computer (14) sending a transaction verification request to a trust server computer (18) interconnected to the computer network (16), the transaction verification request comprising the user identification data and data indicative of the requested transaction; in response to receiving the transaction verification request, the trust server computer (18) authenticating the user computer (12) by using the user identification data and communicating with the user computer (12) for verification with the user identification data; and the trust server (18) authorizing the transaction when the authenticating step has passed.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/04739

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : G06F 13/00; H04K 1/00, H04L 9/00

US CL : 395/186, 187.01, 188.01; 380/3-4, 21, 23-25, 30

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 395/186, 187.01, 188.01; 380/3-4, 21, 23-25, 30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS: firewall, trust# server, secure transaction, authenticate, verify, validate.

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,649,099 A (THEIMER ET AL.) 15 July 1997, Abstract, cols. 5-9.	1
T,E	US 5,785,069 A (OLSEN) 26 May 1998, see entire document.	1-12
T,E	US 5,754,761 A (WILLSEY) 19 May 1998, see entire document.	1-12
Y,P	US 5,684,951 A (GOLDMAN ET AL.) 04 November 1997, see entire document.	1-12
Y,P	US 5,678,041 A (BAKER et al.) 14 October 1997, seen abstract.	1-12
Y,P	US 5,684,950 A (DARE et al.) 04 November 1997, see entire document.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 SEPTEMBER 1998

Date of mailing of the international search report

04 NOV 1998

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

NORMAN WRIGHT

Telephone No. (703) 305-9600

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US98/04739

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,416,842 A (AZIZ) 16 May 1995, see entire document.	1



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**